




Adjustable Pedestal XY-M0-P3 Data Sheet




Composition

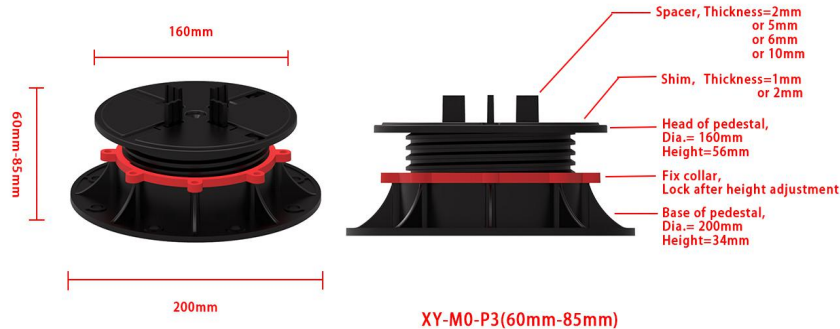


1 head(56mm)+ 1 spacer+1 shim +1 fix collar +1 base(34mm)

Details


Spacer tabs thickness: 2mm/5mm /6mm/10mm



Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference.

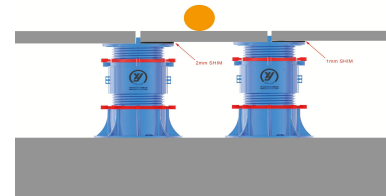

Slope corrector: compensate slope 0%-5%

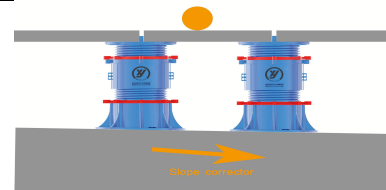

Height Range

60mm-85mm

Material

Composition:90%PP,10% talc,UV adn black masterbatch; 100% recyclable

Performances

Resisting UV rays,weather, sea salt and almost all chemicals
Temperature range :-40℃ to 120℃

Application area

Support for outdoor terraces with any kind of material:timber decking, stone,ceramic,composite materials,metai, fiberglass grid.
Can be placed on any stable substrate,aslo over insulation panels.

Fix collar: fix and lock height after adjustment, increase stability of pedestal



Red collar, customized collar accept. Made of PP

Slope corrector

Slope corectors could compensate ground fall 0%-5% making ideal levelling surface.
choose to use it or not with different installing conditions.

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

Position	Height(mm)	Breaking Load(kgs)
1/1	70	4600
1/2	70	4100
1/4	70	2300

Safety value for maximum allowable load by compression for XY-M0-P3:
★Safety for pedestrian terraces:divide the load indicated in the table by 2 with a safety factor of -15%
★Safety for technical floor:divide the load indicated in the table by 4 with a safety factor of -15%

Weight(g/set)

spacer	17	head	175
shim	30	base	175
fix collar	29	Total	426