



Yiwu Xinyuan Technology Co.,Ltd.


Tel:+86 188 6816 8090 (Kris)

Email:kris@xypedestal.com

Web:www.xypedestal.com

Add:Intelligence Pioneer Park,Fotang Town,Yiwu,China

Adjustable Pedestal XY-M0-T3 Data Sheet

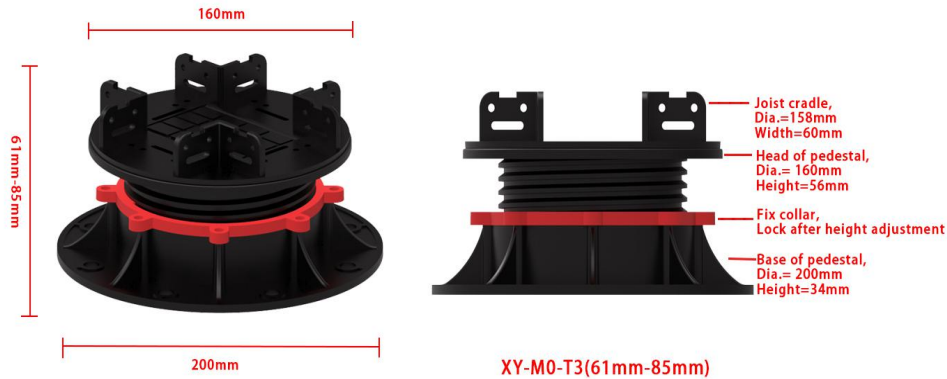

XY-M0-T3(61mm-85mm)


Composition



1 head(56mm)+ 1 joist cradle +1 base(34mm)

Details

Joist cradle
diameter=158mm
width=60mm



Height Range

61mm-85mm

Material

Composition:90%PP,10% talc,UV adn black masterbatch;
100% recyclable


Performances

Resisting UV rays,weather, sea salt and almost all chemicals
Temperature range :-40℃ to 120℃

Application area

Support for outdoor terraces with any kind of material:timber decking, stone,ceramic,composite materials,metal, fiberglass grid.
Can be placed on any stable substrate,aslo over insulation panels.

Slope corrector:
compensate
slope 0%-5%



Fix collar:
fix and lock
height after
adjustment,
increase stability
of pedestal



Red collar,
customized collar
accept.
Made of PP

Slope corrector

Slope correctors could compensate ground fall 0%-5%
making ideal levelling surface.
choose to use it or not with different installing conditions.

Weight(g/set)

joist cradle	120	head	175
fix collar	29	base	175
Total		499	

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

Position	Height(mm)	Breaking Load(kgs)
1/1	70	4600
1/2	70	4100
1/4	70	2300

Safety value for maximum allowable load by compression for XY-M0-T3:
★Safety for pedestrian terraces:divide the load indicated in the table by 2
with a safety factor of -15%
★Safety for technical floor:divide the load indicated in the table by 4
with a safety factor of -15%