



Yiwu Xinyuan Technology Co.,Ltd.

Tel:+86 188 6816 8090 (Kris)

Email:kris@xypedestal.com


Web:www.xypedestal.com

Add:Intelligence Pioneer Park,Fotang Town,Yiwu,China

Adjustable Pedestal XY-M2-PA Data Sheet




Composition

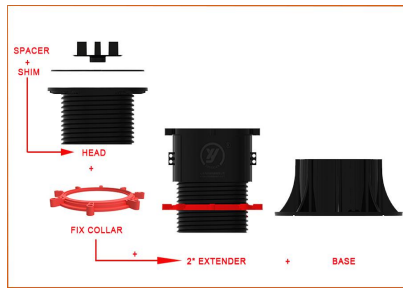


1 head(80mm)+ 1 spacer+1 shim +3 fix collar+2 extender +1 base

Details

Spacer tabs thickness: 2mm/5mm /6mm/10mm




Shim: anti-slip, reduce impact, absorb shock and sound, compensate floor thickness difference.



Height Range

265mm-420mm

Slope corrector: compensate slope 0%-5%



Material

Composition:90%PP,10% talc,UV adn black masterbatch; 100% recyclable


Performances

Resisting UV rays,weather, sea salt and almost all chemicals
Temperature range :-40℃ to 120℃

Application area

Support for outdoor terraces with any kind of material:timber decking, stone,ceramic,composite materials,metal,fiberglass grid. Can be placed on any stable substrate,aslo over insulation panels.

Fix collar: fix and lock height after adjustment, increase stability of pedestal



Red collar, customized collar accept. Made of PP

Slope corrector

Slope corectors could compensate ground fall 0%-5% making ideal levelling surface. choose to use it or not with different installing conditions.

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

Position	Height(mm)	Breaking Load(kgs)
1/1	300	1752
1/2	300	1512
1/4	300	845

Weight(g/set)

spacer	17	head	230
shim	30	base	295
fix collar	29	extender	320
Total			1300

Safety value for maximum allowable load by compression for XY-M2-PA:
★Safety for pedestrian terraces:divide the load indicated in the table by 2 with a safety factor of -15%
★Safety for technical floor:divide the load indicated in the table by 4 with a safety factor of -15%