



Yiwu Xinyuan Technology Co.,Ltd.

Tel:+86 188 6816 8090 (Kris)

Email:kris@xypedestal.com

Web:www.xypedestal.com


Add:Intelligence Pioneer Park,Fotang Town,Yiwu,China

Adjustable Pedestal XY-M2-PB Data Sheet



XY-M2-PB (310mm-470mm)

Composition

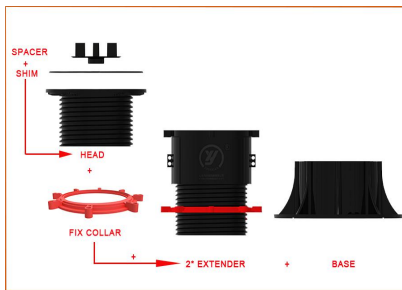


1 head(130mm)+ 1 sapcer+1 shim +3 fix collar+2 extender +1

Details

Spacer tabs  
thickness:  
2mm/5mm  
/6mm/10mm




Shim:anti-slip,  
reduce impact,  
absorb shock  
and sound,  
compensate floor  
thickness  
difference.



Height Range

300mm-470mm

Slope corrector:  
compensate  
slope 0%-5%



Material

Composition:90%PP,10% talc,UV adn black masterbatch;  
100% recyclable

Performances

Resisting UV rays,weather, sea salt and almost all chemicals  
Temperature range :-40℃ to 120℃

Fix collar:  
fix and lock  
height after  
adjustment,  
increase stability  
of pedestal



Red collar,  
customized collar  
accept.  
Made of PP

Application area

Support for outdoor terraces with any kind of material:timber decking,  
stone,ceramic,composite materials,metai, fiberglass grid.  
Can be placed on any stable substrate,aslo over insulation panels.

Slope corrector

Slope corectors could compensate ground fall 0%-5%  
making ideal levelling surface.  
choose to use it or not with different installing conditions.

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

Position	Height(mm)	Breaking Load(kgs)
1/1	400	1746
1/2	400	1500
1/4	400	839

Weight(g/set)

spacer	17	head	322
shim	30	base	295
fix collar	29	extender	320
<b>Total</b>		<b>1400</b>	

Safety value for maximum allowable load by compression for XY-M2-PB:  
★Safety for pedestrian terraces:divide the load indicated in the table by 2  
with a safety factor of -15%  
★Safety for technical floor:divide the load indicated in the table by 4 with  
a safety factor of -15%