



Yiwu Xinyuan Technology Co.,Ltd.

Tel:+86 188 6816 8090 (Kris)

Email:kris@xypedestal.com

Web:www.xypedestal.com


Add:Intelligence Pioneer Park,Fotang Town,Yiwu,China

Adjustable Pedestal XY-M2-TA Data Sheet



XY-M2-TA(260mm-425mm)


Composition

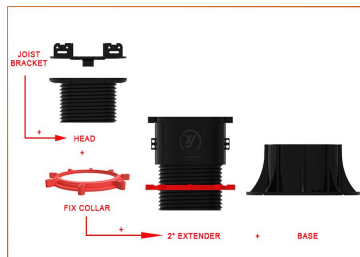

1 head(80mm)+ 1 joist cradle +3 fix collar +2 extender+1 base(75mm)

Details


Joist cradle
diameter=158mm
width=60mm



Height Range

260mm-425mm

Slope corrector:
compensate
slope 0%-5%



Material

Composition:90%PP,10% talc,UV adn black masterbatch;
100% recyclable

Performances

Resisting UV rays,weather, sea salt and almost all chemicals
Temperature range :-40°C to 120°C

Application area

Support for outdoor terraces with any kind of material:timber decking,
stone,ceramic,composite materials,metal, fiberglass grid.
Can be placed on any stable substrate,aslo over insulation panels.

Fix collar:
fix and lock
height after
adjustment,
increase stability
of pedestal



Red collar,
customized collar
accept.
Made of PP

Slope corrector

Slope correctors could compensate ground fall 0%-5%
making ideal levelling surface.
choose to use it or not with different installing conditions.

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

| Position | Height(mm) | Breaking Load(kgs) |
|----------|------------|--------------------|
| 1/1 | 300 | 1752 |
| 1/2 | 300 | 1512 |
| 1/4 | 300 | 845 |

Weight(g/set)

| | | | |
|--------------|-----|-------|------|
| joist cradle | 120 | head | 230 |
| fix collar | 29 | base | 295 |
| extender | 320 | Total | 1372 |

Safety value for maximum allowable load by compression for XY-M2-TA:
★Safety for pedestrian terraces:divide the load indicated in the table by 2
with a safety factor of -15%
★Safety for technical floor:divide the load indicated in the table by 4
with a safety factor of -15%