



Yiwu Xinyuan Technology Co.,Ltd.


Tel:+86 188 6816 8090 (Kris)

Email:kris@xypedestal.com

Web:www.xypedestal.com


Add:Intelligence Pioneer Park,Fotang Town,Yiwu,China

Adjustable Pedestal XY-M3-PA Data Sheet

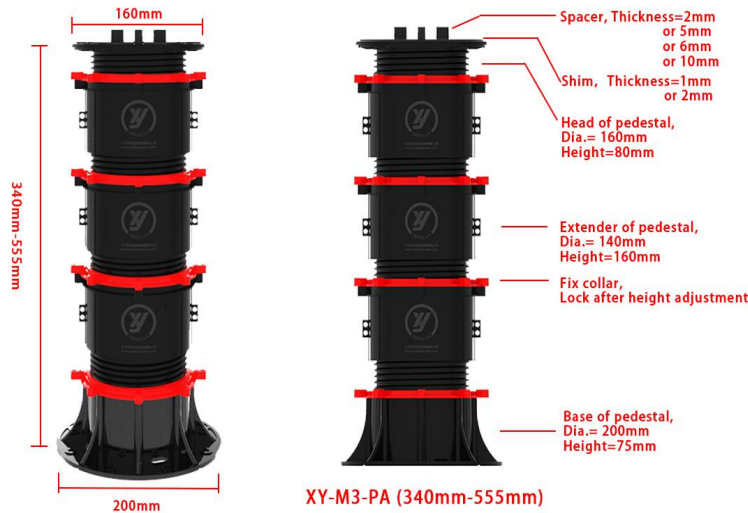

XY-M3-PA (340mm-555mm)


Composition

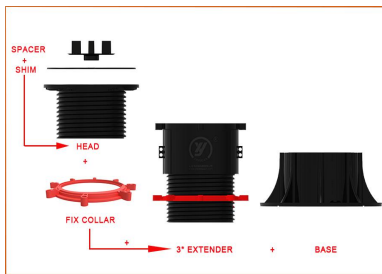


1 head(80mm)+ 1 sapcer+1 shim +4 fix collar+3 extender +1 base

Details

Spacer tabs
thickness:
2mm/5mm
/6mm/10mm



Shim: anti-slip,
reduce impact,
absorb shock
and sound,
compensate floor
thickness
difference.




Height Range

340mm-555mm

Material

Composition:90%PP,10% talc,UV adn black masterbatch;
100% recyclable

Slope corrector:
compensate
slope 0%-5%



Performances

Resisting UV rays,weather, sea salt and almost all chemicals
Temperature range :-40℃ to 120℃

Application area

Support for outdoor terraces with any kind of material:timber decking,
stone,ceramic,composite materials,metal, fiberglass grid.
Can be placed on any stable substrate,aslo over insulation panels.

Fix collar:
fix and lock
height after
adjustment,
increase stability
of pedestal



Red collar,
customized collar
accept.
Made of PP

Slope corrector

Slope corectors could compensate ground fall 0%-5%
making ideal levelling surface.
choose to use it or not with different installing conditions.

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

Position	Height(mm)	Breaking Load(kgs)
1/1	500	1690
1/2	500	1456
1/4	500	826

Weight(g/set)

spacer	17	head	230
shim	30	base	295
fix collar	29	extender	320
Total		1660	

Safety value for maximum allowable load by compression for XY-M3-PA:
★Safety for pedestrian terraces:divide the load indicated in the table by 2
with a safety factor of -15%
★Safety for technical floor:divide the load indicated in the table by 4 with
a safety factor of -15%