



Yiwu Xinyuan Technology Co.,Ltd.


Tel:+86 188 6816 8090 (Kris)

Email:kris@xypedestal.com

Web:www.xypedestal.com


Add:Intelligence Pioneer Park,Fotang Town,Yiwu,China

Adjustable Pedestal XY-M3-TB Data Sheet

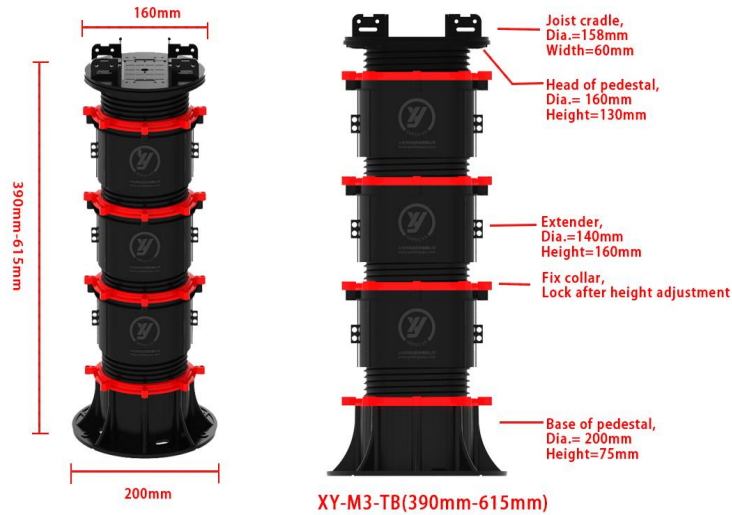

XY-M3-TB(390mm-615mm)


Composition



1 head(130mm)+ 1 joist cradle +4 fix collar +3 extender+1 base(75mm)

Details


Joist cradle diameter=158mm width=60mm



Height Range

390mm-615mm

Slope corrector: compensate slope 0%-5%



Material

Composition:90%PP,10% talc,UV adn black masterbatch; 100% recyclable

Performances

Resisting UV rays,weather, sea salt and almost all chemicals  
Temperature range :-40°C to 120°C

Application area

Support for outdoor terraces with any kind of material:timber decking, stone,ceramic,composite materials,metal, fiberglass grid. Can be placed on any stable substrate,aslo over insulation panels.

Fix collar: fix and lock height after adjustment, increase stability of pedestal



Red collar, customized collar accept. Made of PP

Slope corrector

Slope corectors could compensate ground fall 0%-5% making ideal levelling surface. choose to use it or not with different installing conditions.

Compression test

Performed on the full(1/1),half(1/2)and quarter(1/4) surface of the head

Position	Height(mm)	Breaking Load(kgs)
1/1	550	1680
1/2	550	1455
1/4	550	822

Weight(g/set)

joist cradle	120	head	322
fix collar	29	base	295
extender	320	Total	1813

Safety value for maximum allowable load by compression for XY-M3-TB:  
★Safety for pedestrian terraces:divide the load indicated in the table by 2 with a safety factor of -15%  
★Safety for technical floor:divide the load indicated in the table by 4 with a safety factor of -15%